



genteq Evergreen™

199⁹⁹

S81-250
Mfg. #6005

Evergreen® IM Retrofit Blower Motor

48 frame, ball bearing
Diam.: 5-5/8"
HP: 1/2-1/5
Volts: 115/208-230




CAM-STAT®

76⁹⁹

L37-342
Mfg. #FALTS57C-05T-120A

Combination Fan and Limit Controls with Start Delay

Element Length: 7"
Limit Temp.: 150°F to 250°F



Honeywell Home

56⁹⁹

L49-158
Mfg. #TH6210U2001

T6 Pro Programmable Thermostat

7 day programmable or non-programmable
Up to 2 Heat / 1 Cool heat pump and
1 Heat / 1 Cool conventional
Battery or hard-wired
Large, clear backlit digital display



UEI
TEST INSTRUMENTS

49⁹⁹

H26-252
Mfg. #INF165C

IR Thermometer w/Circular Laser

Circular laser targeting for quick, accurate measurements
12:1 distance-to-spot ratio
Temperature range: -36.4°F to 689°F
Includes batteries and carrying case






Warning: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

Honeywell Home
by **resideo**

Supplier
of the **MONTH**

See pgs 2-3

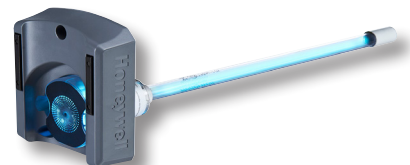

www.JohnstoneSupply.com/Honeywell-Home

Prices valid November 1-30, 2021 at participating Johnstone Supply stores

Supplier of the Month

Honeywell Home
by Resideo

29⁹⁹

L50-848
Mfg. #TH3110U2008/U

T3 Pro Non-Programmable Thermostat

Intuitive non-programmable thermostat
Easy-to-read digital display
Ideal for covering up old thermostat wall marks
5-year warranty when professionally installed



NEW

103⁹⁹

L49-156
Mfg. #TH6220WF2006

T6 Pro Thermostats

WI-FI
Easy setup with the Lyric app
Works with Apple® HomeKit™ and Amazon Echo®



Order #	Mfg. #	Stages Heat/Cool	Price
L49-156	TH6220WF2006	Up to 2/1 Heat Pump or 2/2 Conventional	103.99
L49-362	TH6320U2008/U	Up to 3/2 Heat Pump or 2/2 conventional	89.99

99⁹⁹

L50-693
Mfg. #TH6220D1028

FocusPRO® 6000 Digital Programmable Thermostat

For 24VAC conventional and heat pump systems or 750mV heating systems
5-1-1 day programmable or
5-2 day programmable
Hardwired or battery



219⁹⁹

L44-536
Mfg. #YTH6320R1001

Wireless FocusPro® 6000 Kit

Same great features of the FocusPRO® thermostat - now wireless
Installs in minutes
1-year battery life
Dual Fuel enabled



29⁹⁹

L40-710
Mfg. #C7189U1005

Indoor Sensor for VisionPRO® Thermostat

Small remote temperature sensor
Easy to install and use
Factory calibrated; no field calibration required



59⁹⁹

L46-670
Mfg. #THM5421R1021

Equipment Interface Module

Equipment Interface Module used with all versions of Prestige IAQ and the New RedLINK VisionPRO Thermostats



139⁹⁹

L81-343
Mfg. #UV2400U1000

Honeywell 24V UV Air Purifier

Easy installation
Internal and external mounting options
Low voltage
5-year warranty



49⁹⁹

L37-795
Mfg. #V110D1008

High Capacity Thermostatic Radiator Valve

Nickel-plated bronze casted body with working parts in cartridge insert for ease of service
Size: 3/4"




114⁹⁹

L43-883
Mfg. # HZ311

TrueZONE Panels

Variable-speed fan control reduces blower speed in cooling when one zone is calling
Push-in terminal blocks, color-coded labels and flexible wire routing can cut installation time in half




Order #	Mfg. #	Description	Price
L43-883	HZ311	3 Zone, 1H/1C Panel Used for Conventional Equipment	114.99
L80-116	HZ322K	Includes (1) HZ322 Panel, (1) Transformer and (1) C7735A Discharge Air Temperature Sensor	189.99

119⁹⁹

L44-673
Mfg. #ST9120U1011

Universal Electronic Fan Timer

Replaces 44 existing Honeywell controls series (ST9120, ST9101, ST9141, and ST9160)
Includes replaceable fuse and DIP switch with selectable heat and cool delay




129⁹⁹

L48-287
Mfg. #S8910U3000

Universal Hot Surface Ignition Module

Field selectable dip switches
Expands cross reference to over 800 controls
Pre-purge



54⁹⁹

L38-632
Mfg. #Q3400A1024

Ignitor Flame Rod Assembly

30" lead and ignition wire length
Size: 1/2" inlet x 1/2" outlet
Used with SV9500, SV9600
Field replacement for Q3450, Q3480 hot surface pilot burner



84⁹⁹

R56-908
Mfg. #AM100-1LF/U

Lead Free AM-1 Series Mixing Valve

Features dual purpose mixing or diverting valves
Conn. Size: 1/2" NPT



36⁹⁹

L38-866
Mfg. #FPC

Freeze Protection Control

Breaks Y circuit to compressor below 36 F and remakes at 46 F



94⁹⁹


L86-051
Mfg. #L4064B2228

Fan and Limit Controls

Fan ON range: 65°F to 215°F
Fan OFF range: 50°F to 200°F
High limit range: 100°F to 250°F




Order #	Mfg. #	Element Length	Price
L86-051	L4064B2228	5"	94.99
L86-052	L4064B2236	8"	94.99



Mini-Split Selector



Select Your Mini-Split System with Confidence!

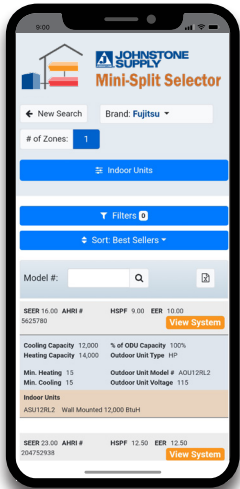

The **NEW Mini-Split Selector Tool** allows you accurately and quickly identify the best system match ups for your needs.

Mini-split systems are constantly evolving to meet consumer needs and regulatory requirements. Quickly identify systems that meet efficiency requirements, capacity needs or outdoor temperature constraints.

- Research, build and order from tablet, phone or computer
- Accurate; up to date models and compatibility
- Single zone or multi-zone
- Easy indoor style selection and identification
- AHRI certificates
- Real-time pricing and availability

Scan to try the Mini Split Selector



Technical guides, submittal sheets, installation guides



Essential accessories including manufacture required controls and installation supplies

www.JohnstoneSupply.com/mini-split-selector (must be logged into www.JohnstoneSupply.com to access)



Ductless Mini-Split Systems

Up to 18.9 SEER, Multi Zone Heat Pumps, R410A

Heat or cool up to 5 spaces individually with a single outdoor unit

Control your system from anywhere with the Daikin Comfort App

Self diagnosis with digital display

Inverter variable speed compressor

208-230V




Order #	Mfg. #	Unit Type	SEER	BtuH Cooling	BtuH Heating
Single and Multi-Zone Indoor Units					
B73-339	FTXS09LVJU	Wall Mounted Indoor	—	9,000	12,000
B73-340	FTXS12LVJU	Wall Mounted Indoor	—	12,000	14,400
B60-807	FDMQ12RVJU	Ducted Indoor	—	10,800	13,600
B79-334	FFQ09Q2VJU	Cassette Indoor	—	9,100	10,000
B79-335	FFQ12Q2VJU	Cassette Indoor	—	10,800	13,500
B76-559	FVXS09NVJU	Floor Mounted Indoor	—	9,000	10,100
B76-560	FVXS12NVJU	Floor Mounted Indoor	—	10,200	13,000
Multi-Zone Outdoor Units - Low Ambient					
B78-633	2MXL18QMJJUA	Outdoor	17	18,000	18,900
B60-818	3MXL24RMJJUA	Outdoor	18	24,000	24,000
B61-724	4MXL36TVJU	Outdoor	21.7	34,400	36,600

The Department of Energy is changing the way HVAC Systems are tested as of January 1st 2023

Products affected by the new SEER2 Regulations:

- Air Conditioner Condensing Units
- Heat Pumps
- Single Packaged Units
- Evaporator Coils
- Gas Furnaces

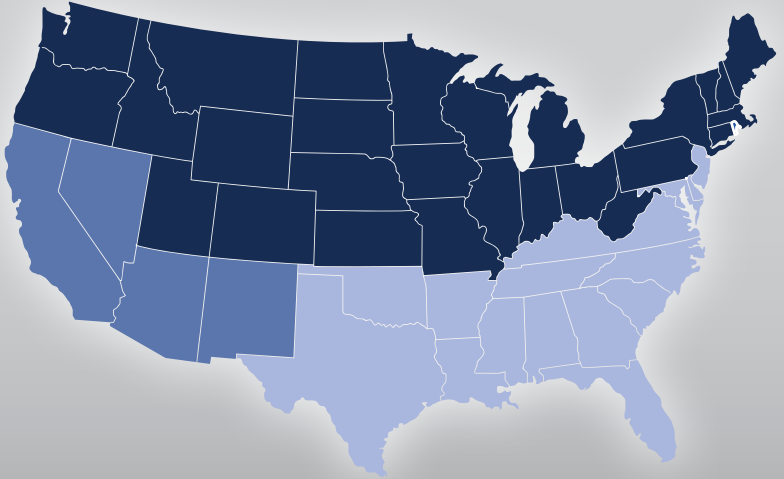

Visit www.seer2.com to learn more



Free • Simple • Intuitive




ORDER FROM ANYWHERE!

Tablet, Phone or Computer - the System Selector is Now Mobile!

With over 800,000 current certified matches, the System Selector will find the right heating and air conditioning combination for the job!

Include IAQ System upgrades and the Installation Supplies to complete the job with easy selections.

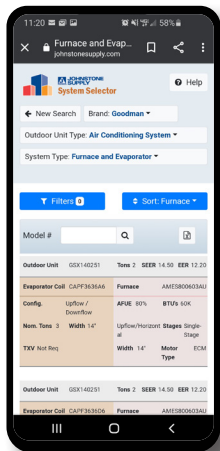

www.JohnstoneSupply.com/system-selector

Must be logged into www.JohnstoneSupply.com to access

The 2021 Fall eCatalog is Now Live!



Scan to Open



Access the eCatalog No Matter Where You Are!

249⁹⁹

B84-261
Mfg. #700M

Powered Humidifier

Operates on hot, cold, softened, or unsoftened water
Built-in fan pulls heated air directly from the surface
6" diameter round opening
Volts: 120
Output: 18




25⁹⁹

B16-870
Mfg. #4655

Manual Humidistat

Replaces Model 4016
For use with 500M, 600M, 700M
Can be installed on the wall or return duct-mounted




WHITE-RODGERS

99⁹⁹

L51-064
Mfg. #50D50U-843

All-Spark™ Intermittent Pilot/Direct Spark Ignition Module

Configurable for both 24V intermittent pilot and direct spark ignition systems
Quick configuration without power




24⁹⁹

L46-849
Mfg. #36G22-254

Universal Gas Valve

Drop in replacement for Goodman O15100013
Electric on-off switch
Convenient quick-connect coil terminals and built-in pressure taps




17⁹⁹

L36-479
Mfg. #24A34-5

Therm-o-Disc Heat Sequencer

Replaces Klixon, Mars, White-Rodgers, Watsco, Honeywell, and Supco
Double quick-connect terminals for combination and heater loads




24⁹⁹

L36-075
Mfg. #G01A-505

Replacement Generator for Millivolt Applications

Replaces White-Rodgers G01A-505, Honeywell Q313A1188, and Robertshaw 1950-532



EXPERTS YOU CAN COUNT ON. A PARTNER YOU CAN TRUST.

THAT'S THE POWER OF **JOHNSTONE**

Packard

WE HAVE THE REPLACEMENT DRAFT INDUCERS YOU NEED!

DIRECT REPLACEMENT OPTIONS

TRANE | YORK AND MORE | CARRIER | COLEMAN | GOODMAN | ICP | LENNOX | NORDYNE | BHEEM

WWW.JOHNSTONESUPPLY.COM/PACKARD

PACKARD SUPPLIES TO WHOLESALE DISTRIBUTION ONLY | ©2021 PACKARD, INC.



319⁹⁹

S83-271
Mfg. #5862

EZ16™ Blower Motors

Universal ECM replacement for furnaces and air handlers
Universally compatible with all 2.0, 2.3, EON motors and Nidec 16X4W
Field tunable with EZI (*included*)
Replaces thousands of OEM models
Connects the same as OEM
Adjustable airflow at point of installation



Order #	Mfg. #	Diam.	HP	Volts	Price
S83-271	5862	5-5/8"	1/2-1/3	115/208-230	319.99
S83-272	5861	5-5/8"	3/4-1/3	115/208-230	349.99



249

R55-601
Mfg. #FB-1

Furnace Mounting Pad

Anti-vibration support
Carrying capacity - up to 500 lbs.
Easy peel and stick installation



549

G89-755
Mfg. #315-20



Spray Adhesive

High strength, multi-purpose
Bonds to porous & non-porous surfaces
12 oz.



499

B86-374
Mfg. #AER-8



Adjustable Equipment Riser

Twists up from 5"-8"
Separate top cap allows for raising or lowering the riser with the equipment already on it
Convenient height marking provided for reference



15⁹⁹

G80-192
Mfg. #AFG-1402-2

Rolled Mastic Duct Sealants

For indoor or outdoor use



Order #	Mfg. #	Color	Size	Price
G80-192	AFG-1402-2	Silver	2" x 100'	15.99
G80-193	AFG-1402-3	Silver	3" x 100'	22.99



Proper Airflow is Critical for Indoor Health

EVALUATE



Increased filtration to MERV-13 levels reduces the risk of infection, but may require adjustments in fan/blower belt drive components and electric motors.

UPGRADE/REPAIR



Worn components reduce air flow - check sheaves and belts for wear regularly. Even 1/32" of sheave wear can cause efficiency loss of 5% or more.

Upgrade to more efficient ECM motors to reduce cost and maintain consistent air flow.

OPEN



- Run ventilation for at least two hours before occupants arrive, or 24/7
- Run nights and weekends at least at a low setting, rather than turning ventilation off
- Switch air handling units with recirculation to 100% outside air when weather permits
- Run ventilation in restrooms 24/7

www.JohnstoneSupply.com/Browning

Honeywell

649⁹⁹

L86-168

Mfg. #M9185D1004

Modutrol™ IV Series 3 Motor

NEMA 3 weather protection if mounted upright
Integral spring return in the event of power failure
Quick-connect terminals are standard; screw terminal adapter is available



54⁹⁹

L46-111

Mfg. #C7400S1000

C7400 Enthalpy Sensor

For W7220 Jade Economizer Logic Module
This unit mounted C7400S enthalpy sensor includes solid state temperature and humidity sensors
Ambient temperature operating range from -40° to 150° F



89⁹⁹

L44-379

Mfg. #TB6575B1000

SuitePRO Commercial Thermostat

Simple, intuitive user interface and easy installation
VersaSpeed™ Fan Ramp Algorithm automatically adjusts Low, Medium, High fan speed



64⁹⁹

L47-814

Mfg. #A421ABC-02C

Electronic Temperature Control

Replacement for A419 Series Temperature Controls
Line voltage
NEMA 1 enclosure
Volts: 120/208/240
Sensor lead: 6.5ft (2m)




119⁹⁹

L38-286
Mfg. #T-4002-301

Universal Replacement Thermostat Kit

Includes thermostat, cover, cover plate, all parts and mounting hardware necessary for conversions



89⁹⁹

L36-932
Mfg. #A19BBC-2

Remote Bulb Temperature Control

Switch action: SPDT
Temperature range: -30°F to +100°F
Differential: 3° to 12°



84⁹⁹

B11-386
Mfg. #P70AA-118C

High Pressure/Condenser Fan Cycling Control

36" capillary with 1/4" flare nut
Pressure range: 100 to 400PSIG
Differential: 35 to 200PSIG
Switch action: SPST Close High / Open Low



14⁹⁹

B18-784
Mfg. #P100AP-332C

Pressure Control

Electrical rating: 5.8 FLA @ 115VAC; 2.9 FLA @ 230VAC
1/4" diameter female flare pressure port



79⁹⁹

B18-468
Mfg. #R26E63M

R-Series Refrigeration Solenoid Valve

Requires PKC-1 Coil
Compatible with all CFC, HCFC and HFC refrigerants, including R410A; rated at 600 PSI



16⁹⁹

B10-091
Mfg. #PSG-3S

Sight Glass Moisture Indicator

Leak-proof sight glass
Solid copper ends
Conn. Size: 3/8" ODF
Overall Length: 4-7/8"



49⁹⁹

B18-300
Mfg. #PKC-1-120/240

Solenoid Valve Coil

Complete coil assembly with junction box
OPKC series for normally open solenoid valves and PKC normally closed
Wide range of voltages



15⁹⁹

B10-126
Mfg. #LLD-163S

Liquid Line Filter-Drier

All copper 3/8" ODF connections
R22/R410A capacity 5.0 tons
UL listed to 3000 PSIG burst pressure



249⁹⁹

B92-108
Mfg. #C17AG



Reach-In Unit Coolers

Room for TXV inside



Order #	Mfg. #	Defrost	Volts	Phase	CFM	No. of Fans	Price
Model C High Profile							
B92-108	▲ C17AG	Air	115	1	250	1	249.99
Model TA Thin Profile							
B92-111	▲ TA17AG	Air	115	1	210	2	279.99


479⁹⁹

B73-773
Mfg. #AE4440Y-AA1ASC



R134a High Temperature Condensing Unit

B/M: 32F360-59S
HP: 1/3
Volts: 115



NEW

1299⁹⁹

B63-506
Mfg. #CELO125AS6AMAB0400

Low Profile DOE Compliant Evaporator Air Defrost

Defrost: Air
Volts: 115
Phase: 1



2499⁹⁹

E73-046
Mfg. #XFAM-015Z-CFV-081



Outdoor Medium Temperature Scroll Condensing Unit

Uses ZS09KAE-PFV compressor
Refrigerant: R404A
HP: 1-1/2



104⁹⁹

G80-937
Mfg. #75-0093

Strip Curtain

Each Strip is 6" wide, 0.06" thick
50% overlap
Strips equipped with Kason cleats, which slide into the easimount



19⁹⁹

G37-666
Mfg. #74-0011

Door Heater Wire 230" (115 Volt)

Commonly used replacement part used in walk-in coolers and reach-in coolers



99⁹⁹

G37-309
Mfg. #75-0006

Hydraulic Door Closer (Exposed Mounting)

OEM Replacement for: 1094



28⁹⁹

G80-730
Mfg. #314CRT

Cooler Repair Tape

Seals and repairs cracks and seams
All temperature acrylic adhesive
Resists UV, mold and moisture



Order #	Mfg. #	Description	Size	Price
G80-730	314CRT	Silver	4" x 15 Yds.	28.99
G80-731	314CRT	White	4" x 15 Yds.	28.99



124⁹⁹

H27-304
Mfg. #SDMN5

Dual Port Manometer

Features zero adjust button, rugged rubber boot, magnetic hanger and auto power off
Range: -60" to +60" W.C.



209⁹⁹

H27-620
Mfg. #SCM4

Carbon Monoxide Detector

Field replaceable smart sensor
Fast enough to locate CO in "walk-around" tests
Alarm and max function




129⁹⁹

H86-123
Mfg. #22733RF-18

Patriot 2-Valve Manifold for Hydrocarbon Refrigerants with REFLEX[®] Hose Set

For use with R32, R290 and R600A
Class 1 gauges with 1% accuracy



229⁹⁹

H85-963
Mfg. #LDC-4000

Refrigerant and Combustible Gas Leak Detector

Solid state heated sensor with over 300-hour sensor life



Truly Smart Combustion Analysis. The testo 300 series Combustion Analyzer!

FEATURES

- Large scratch-resistant 5" HD Smart-touch display
- Intuitive menus standard
- Ready to measure via standby mode
- 4,000ppm Standard, up to 30,000ppm w/ optional dilution
- E-mailing of reports directly on site



H86-103
Mfg. #0564-3004-93

Order #	Mfg. #	Description	Price
H86-099	0564-3002-82	testo 300 Residential/Commercial Combustion Analyzer Kit	1189.99
H86-100	0564-3002-83	testo 300 Residential/Commercial Combustion Analyzer Kit with Printer	1449.99
H86-102	0564-3004-92	testo 300 LL Commercial Combustion Analyzer Kit	1659.99
H86-103	0564-3004-93	testo 300 LL Commercial Combustion Analyzer Kit w/ Printer (NOx Capable)	1865.99

**H86-099, H86-100 - 2 year sensor warranty | H86-102, H86-103 - 4 year sensor warranty

www.JohnstoneSupply.com/testo

Be sure. **testo**

testo 310

Residential Combustion Analyzer

- Measures O₂, CO (up to 4,000 ppm), draft, pressure, temperature, and calculates CO₂
- Full diagnostics at start up
- Built-in condensate trap protects sensors



Order #	Mfg. #	Price
H85-699	0563-3100-01 testo 310 Combustion Analyzer	619.99
H85-700	0563-3110-01 testo 310 w/ Printer	769.99



Holiday Meals for Military

Since 2008 **OPERATION HOMEFRONT** has served nearly 80,000 military families, impacting over 330,000 family members. Johnstone Supply is proud to help Operation Homefront support our military families for the holidays.

Ask how you can help today!



The FUJITSU ELITE Advantage

- Priority ranking on Fujitsu's online Contractor Locator
- Special promotions, financing and rebates

www.JohnstoneSupply.com/Fujitsu



44⁹⁹

H25-280
Mfg. #85075

5-Piece Screwdriver Set

3/16" and 1/4" cabinet, 1/4" and 5/16" keystone, #2 Phillips
Cushion grip handles




Now Available at Johnstone

The Fastest, Easiest and Most Reliable Way to Install Ductwork and Equipment



Suspension System

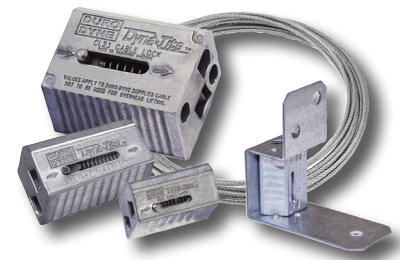

399⁹⁹

H28-715
Mfg. #TG165-X

MSX Thermal Camera

Temp. Range: -13°F to +572°F
2.4" color LCD with 80 x 60 pixel IR resolution
24-to-1 distance-to-spot ratio
Thermal sensitivity/NETD: <70mK



449⁹⁹


R94-779
Mfg. #CL12WC3SK

Dyna-Tite Starter Kit

Includes 500-Foot roll of WC3-CL12 wire rope, 100 CL12-WC3 cable locks, cable counter lid, cable cutter and bucket



Warning: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

 Prices subject to change. Product descriptions and illustrations are for identification only; products may not conform exactly to the descriptions or illustrations. Offers limited to stock on hand; no rain checks. Offers may be modified at any time. Offers may not be combined with any other sale, promotion, discount, code, coupon and/or offer. Offers have no cash value, are not valid on prior purchases, gift cards or certificates, taxes, shipping or processing charges and are void where prohibited or restricted by law. Purchaser pays all applicable taxes. Unless otherwise noted, offers available only to residents of the United States and its Territories. Other restrictions may apply. All rights reserved, no part of this mailer or its inserts may be reproduced in any form without written permission from Johnstone Supply. Copyright © 2021 Johnstone Supply.